




Shd_foundation_08_150.vp3
5.91x5.91 inches; 2,030 stitches
43 thread changes; 4 colors




Shd_foundation_08_150a.vp3
5.91x5.91 inches; 4,727 stitches
44 thread changes; 5 colors




Shd_foundation_08_150q.vp3
5.54x5.54 inches; 2,697 stitches
1 thread changes; 1 colors




Shd_foundation_08_200.vp3
7.87x7.87 inches; 2,638 stitches
43 thread changes; 4 colors




Shd_foundation_08_200a.vp3
7.87x7.87 inches; 6,175 stitches
44 thread changes; 5 colors




Shd_foundation_08_200q.vp3
7.38x7.38 inches; 3,537 stitches
1 thread changes; 1 colors




Shd_foundation_08_240.vp3
 9.44x9.44 inches; 3,121 stitches
 43 thread changes; 4 colors




Shd_foundation_08_240a.vp3
 9.44x9.44 inches; 7,337 stitches
 44 thread changes; 5 colors




Shd_foundation_08_240q.vp3
 8.86x8.86 inches; 4,216 stitches
 1 thread changes; 1 colors



Shd_foundation_08_260.vp3
 10.23x10.23 inches; 3,364 stitches
 43 thread changes; 4 colors



Shd_foundation_08_260a.vp3
 10.23x10.23 inches; 7,912 stitches
 44 thread changes; 5 colors



Shd_foundation_08_260q.vp3
 9.59x9.60 inches; 4,548 stitches
 1 thread changes; 1 colors




Step 1

will outline the first placement

then lay your piece down
allowing for seam allowance
and it will sew out all around
and you can trim

I hoop backing and cotton batting

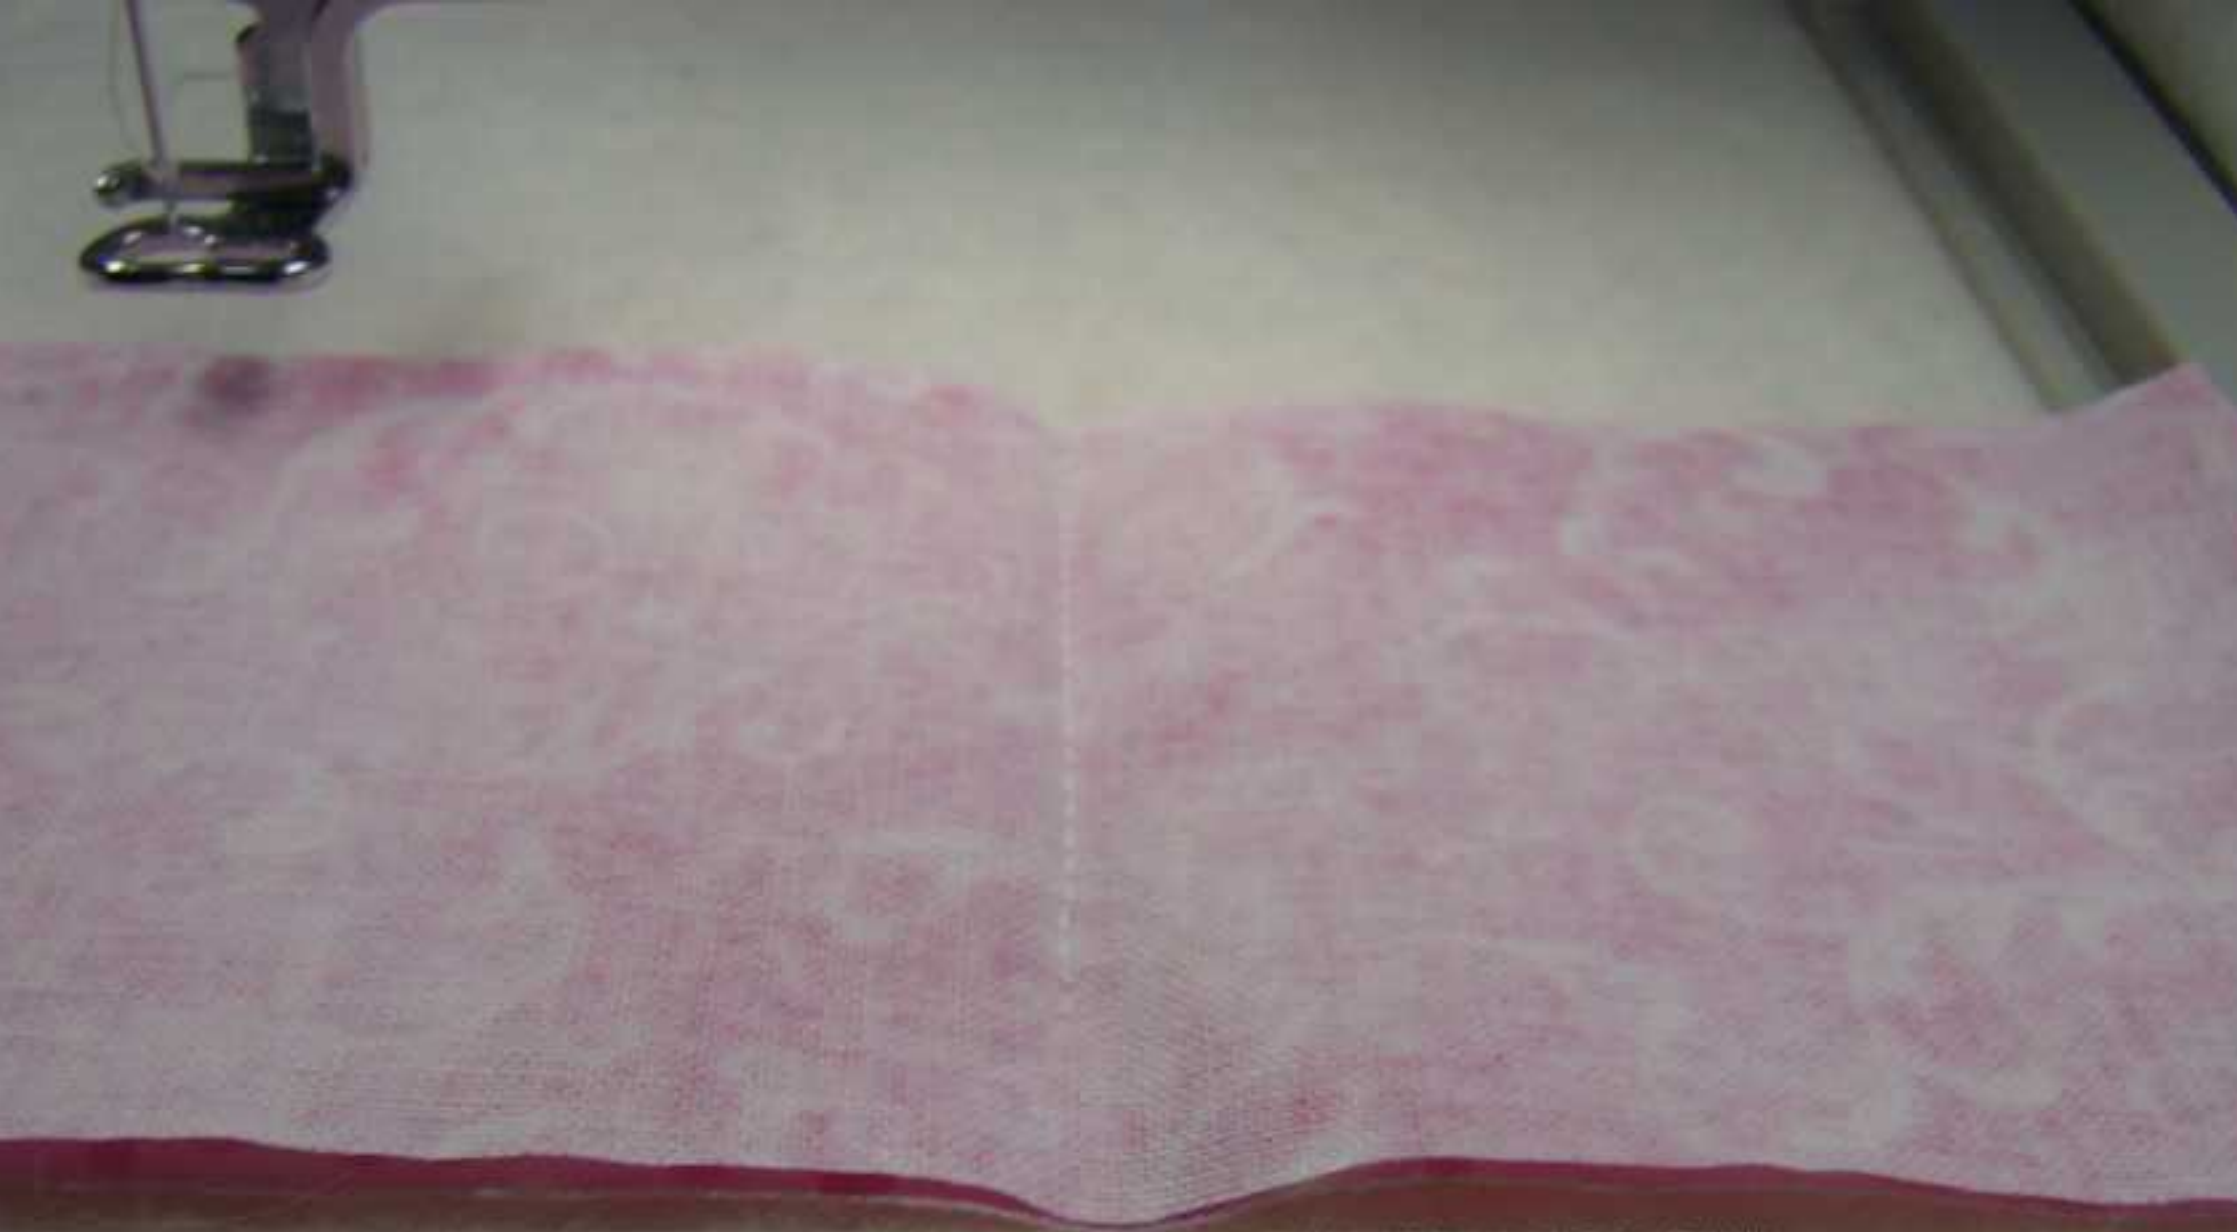

Place second fabric down along the proper place
and sew to the first fabric
Flip out and smooth out
and next step is to sew the placement line for third fabric
trim if needed

START
STOP

fold out and trim

240 x 240mm 9-1/2" x 9-1/2"



fold over and finger press
next placement line will sew



Place next fabric strip over placement line
making sure you have a 1/4 inch seam
Sew seam



trim once again



9-1/2" x 9-1/2"

Fold out, Finger press and
next placement line will sew out

240 x 240mm

9-1/2" x 9-1/2"

place next fabric strip just over the placement line
leaving a 1/4 inch seam allowance
and sew



Continue following the numbers
on the finished block



At the end a basting out line sews out
and you can use this line to cut a perfect square

